




MODEL 500P

HYDRAULIC COOLING SYSTEM & TANK STABILIZER

The Safety & Reliability of a Hydraulic Drive with the Added Benefit of Increased Pump Flow Rates From The Tank Stabilization.

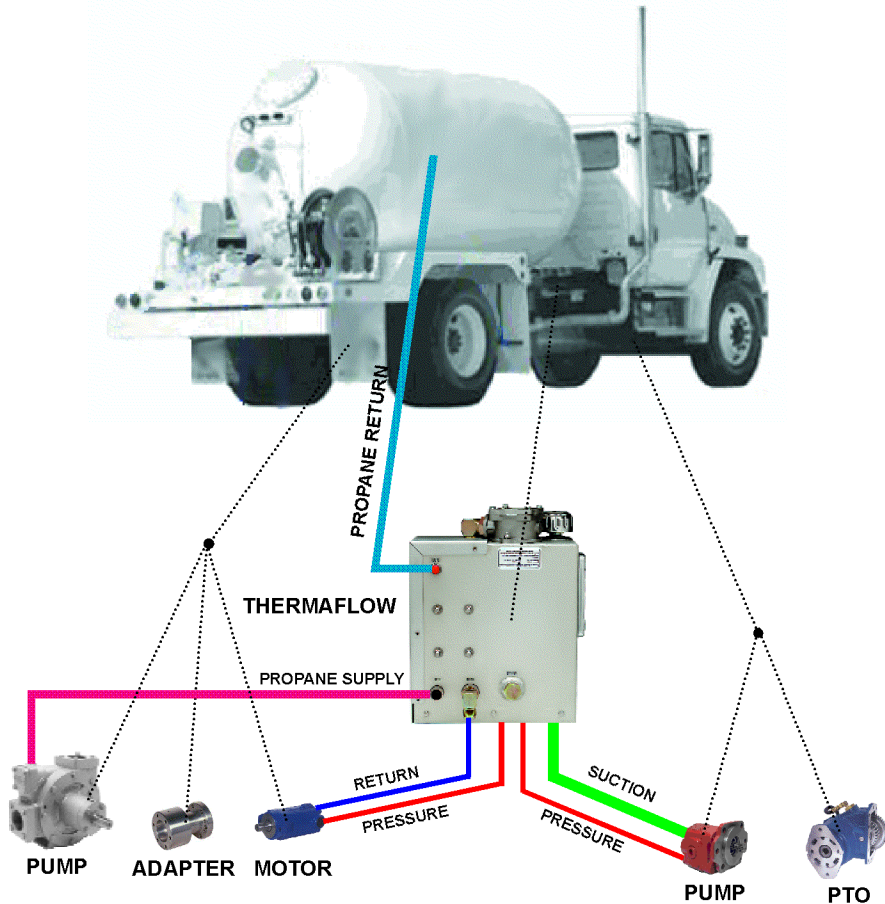

NO DRIVESHAFT

- Safer
- Quieter
- Lower Maintenance Costs
- Less Down Time

NO FAN MOTOR


- No Motor Maintenance
- No Leaky Messes
- Quiet Operation
- No Moving Parts

TANK STABILIZATION

- Increased Pump Flow Rates
- Quieter Pump Operation
- Longer Pump Life
- UL Listed/ASME Certified

SPECIFICATIONS

- Flow Rate: 25 GPM
- Pressure: 3000 PSI
- Weight: (Dry) 34 LBS
- Reservoir: 2.5 Gallons
- Warranty: 2 Years

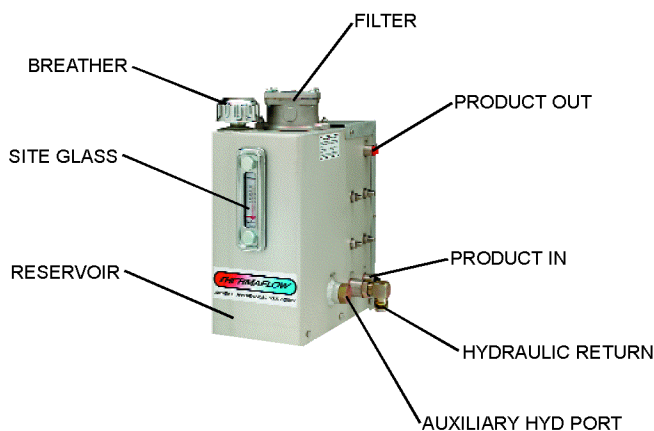

MOBILE HYDRAULIC SYSTEMS FOR TRANSPORTS AND BOBTAILS



St Paul MN 55113
800-334-7699
www.THERMAFLOW.net